

Y22

## Inductive High-Temperature Sensors Series - 250


Housing M 32 x 1.5

- For connection to the evaluation unit ISA-250...
- Housing material: Stainless steel VA No. 1.4305 (AISI 303)
- For an ambient temperature of max. 250 °C



<b>Technical data</b>	Non-flush mountable
Operating distance $S_n$	15 mm
<b>Type</b>	<b>IS-250-M32/65-X-M32-PTFE/VAb-250C-X02/Y22-0</b>
<b>Art.-No.</b>	<b>552 100</b>
Permitted ambient temperature	-50...+250 °C
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2
Connection for inductive evaluation units ISA-....	2 m FEP, Triax
Housing material	Stainless steel VA No. 1.4305 (AISI 303)
Active surface	PTFE (FDA 21 CFR 177.1550)
<b>Accessories</b> (delivered with the sensor)	2 nuts M 32 x 1.5

All specifications are subject to change without notice. (23.11.2022)

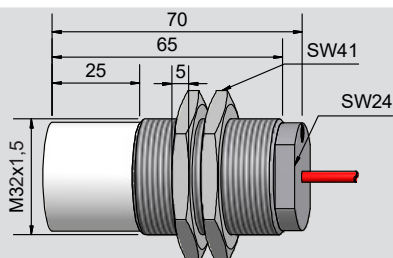

**Made in Germany**