


HS-SE-PCM Switching Enclosure

Polycarbonate

Key Features


- BNC and 2 Pin MS Output
- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via one connector
- Easy to install

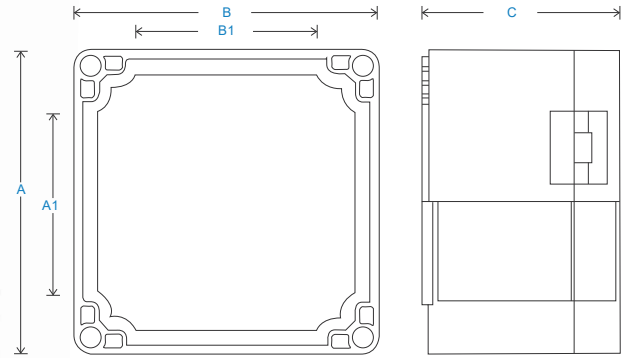

Technical Performance

Inputs	Via accelerometer	Door	Catches
Output	BNC and 2 Pin MS as standard	Glanding	Glands supplied but not fitted
Mounting Board	PCB Panel		Holes are punched for:
	(customisable upon request)		Single input M12 - \varnothing 3.5-7mm cable
Material	Polycarbonate (to be specified in options of 'How To Order' table)		Single input M20 - \varnothing 7-13mm multi-core cable
			Multi input M20 - 3 x \varnothing 5.3mm
Dimensions	see: 'How To Order' table	Labelling	Channel locations - other labelling available upon request
Sealing	IP66	Mounting	supplied are 4 x Brackets
Termination	Spring-loaded terminal	EMC	EN61326-1:2013

How To Order

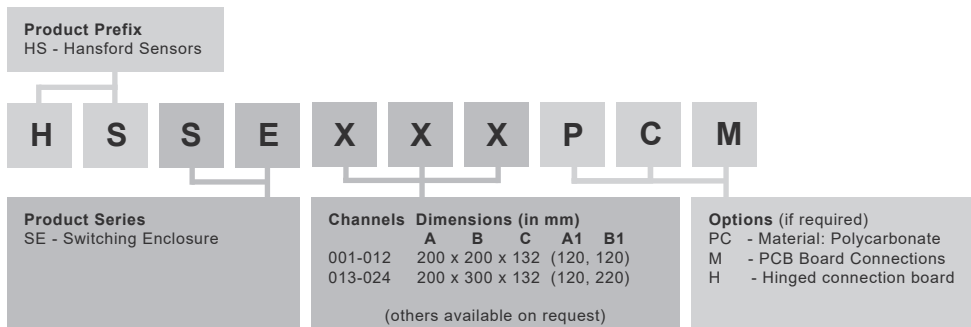

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS149.8

