




Inductive Sensors Series 10 - PNP

- Housing M 30 x 1.5
- Housing material: Brass
 - Sensing distance $S_n = 15$ mm



Technical data	Non-flush mountable
Operating distance S_n	15 mm
Electrical version	3-wire DC
Output	Normally open
Type PNP	IAS-10-A24-S-M30-PVC/MS-Z02-0
Art.-No.	IA 8004
Operating voltage (U_b)	10...30 V DC
Operating current (I_b)	0...200 mA
Voltage drop max. (U_d)	≤ 2.0 V
Permitted residual ripple max.	10 %
No-load current (I_o)	Typ. 10 mA
Frequency of operating cycles max.	700 Hz
Permitted ambient temperature	-25...+70 °C
LED-display	Orange
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable	2 m, PUR
Housing material	Brass
Active surface	PVC
Accessories (delivered with the sensor)	2 nuts M 30 x 1.5

All specifications are subject to change without notice. (22.04.2020)

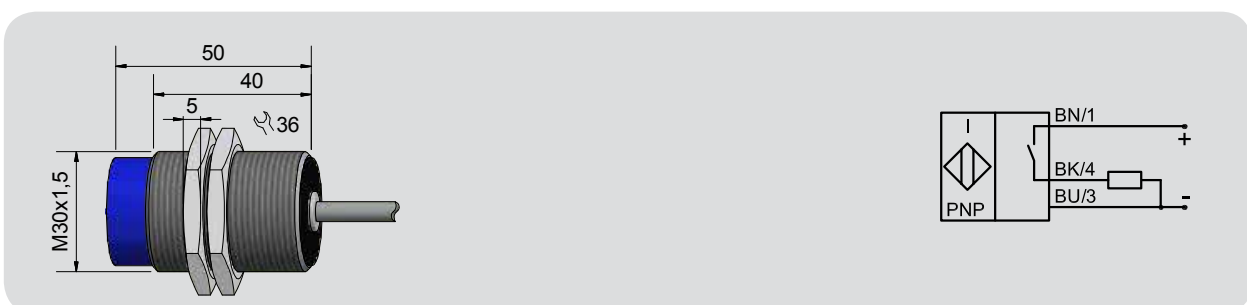

Made in Germany