



Y55

PER **LeVeL**® Capacitive Filling Level Probe - KFS  
2 Limit value switching points


- For connection to the capacitive amplifier KFA-5-...-Y55
- Housing material: PTFE, Ø 16 mm



### Technical data

Active Zone [mm]	15, related to probe tip + 1 x type specific X2
Type for evaluation unit Y50	<b>KFS-52-15-1800-15/X2-PTFE-D16-X02-Y55</b>
Art.-No.	<b>KF 0618</b>
Permitted ambient temperature (for active zone)	-50...+250 °C
Degree of protection IEC 60529 (probe)	IP 67
Norm	EN 60947-5-2
Connection cable to the evaluation unit KFA-5-...-Y55	2 m coax-cable with connectors
Housing material	PTFE (FDA 21 CFR 177.1550)
Housing material active zone	PTFE (FDA 21 CFR 177.1550)
Accessories for mounting (not delivered with the probe) please see our selection of accessories.	

All specifications are subject to change without notice. (26.08.2022)

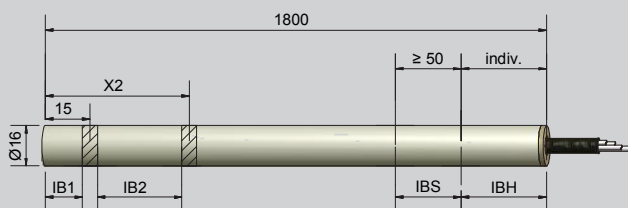

Technical data for connectors on request.  
Other housing materials for the active zone (probe), like PVDF, PEEK or PE on request.

**Made in Germany**