

Hillmar

Hillmar Industries Ltd.

7371 Vantage Way
Delta, BC V4G 1C9
P:604 946-7115 F:604 946-0329
info@hillmar.com www.hillmar.com

INDUSTRIAL DBCB DBCBS-209-7200 SPECIFICATION SHEET SLS & MKTG ENGLISH

Sheet Number:

Job Number:

Form Number:

829-723-46119PT

Document Package No.:

Rev.:


Company / Project Reference:

Date.:

Page.:

1 OF 1

Inventor Drawing


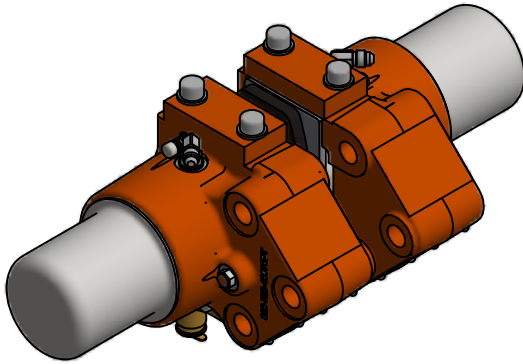


FEATURE	CODE
Industrial disc brake	DBCBS
Series	CSB
Brake size	209
Foot mount	/
Nominal braking force F_B (N)	7200

Example for ordering	DBCBS-209-7200
-----------------------------	-----------------------

TECHNICAL DATA

Clamping force (N) (F_c)	18000	
Braking force static $\mu=0.5$ (N) (F_B)	9000	
Braking force dynamic @ $\mu=0.4$ (N) (F_B)	7200	
Loss of force pre 1mm of pad wear (%)	4.3	
Maximum wear of each brake pad (mm)	Sintered	6.5
	Organic	6.5
Disc thickness B_1 (mm)	15 - 30	
Theoretical friction diameter	$\varnothing D_1$	
Disc diameter	$\varnothing D_2$	
Maximum coupling hub diameter	$\varnothing D_3$	
Brake pad width (m)	0.06	
Nominal air gap	1 mm / side	
Braking torque (Nm) (M_B)	$M_B = F_B \times (D_2 - 0.07) / 2$	
Operating pressure (bar)	87	
Maximum pressure (bar)	97	
Oil volume (CC) to release 1mm/half	1.34	
Pressure port connection (2 ports) T1	-4 37° JIC	
Temperature range (°C)	-20 to +70	
Standard paint PASTEL ORANGE	RAL #2003	
Mounting holes (brake)	3 x $\varnothing 16.5$	
Mounting bolts	3 x M16 CL 10.9	
Bolt tightening torque	300	
Weight of brake (2 halves) (kg)	40	

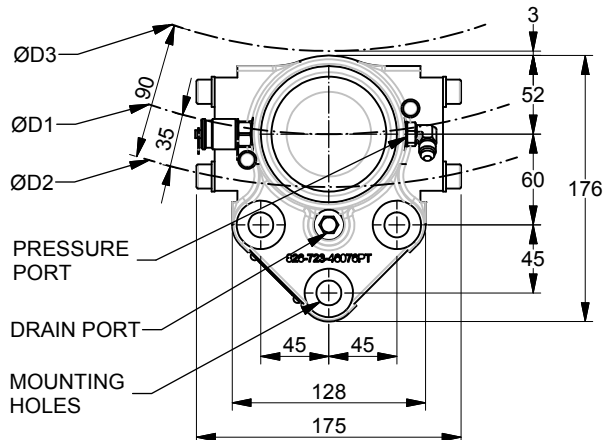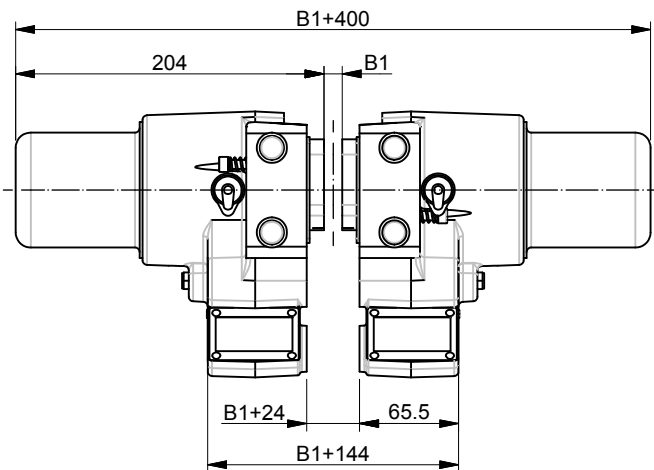

Document Template #710-101-62058

** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE **

Hillmar works have a fully registered ISO 9001-2008 quality assurance programme (QCB #01-1525)

NOMINAL SPECIFICATION

Actual torque may vary depending on adjustment of brake and coefficient of friction. Brake supplied standard with organic linings.

Bearing and structure loads must be checked due to unbalanced brake loads.

NOTES

All figures are nominal figures only

All dimensions are in millimeters